

# E-CLASS™

## THE “MORE SKY” SKYLIGHTS

Our energy-efficient E-Class™ skylights are designed to deliver more light per rough opening, and install in less time than any of the leading brands. Choose either venting or fixed styles, in standard or custom sizes.






## CHOOSE THE BEST SKYLIGHT TO FIT YOUR NEEDS


All three styles come in standard or custom sizes.



FIXED

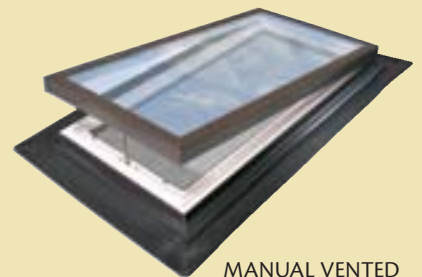

MANUAL VENTED

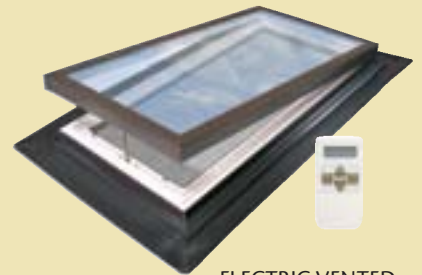

ELECTRIC VENTED





## E-CLASS OPTIONS AND ACCESSORIES

### ELECTRONIC REMOTE-CONTROLLED MOTOR

for venting models. Includes rain sensor to automatically close the skylight in bad weather. Any number of skylights, may be controlled from one remote. (Multiple motors required. Please call for details.)

### ALUMINIZED PRIVACY PLEATED SKYSHADE™

(for venting or fixed models) mounts in the skylight opening below the glass. Shades have no side rails, maximizing daylight.

### WIRELESS REMOTE CONTROL

for motorized SkyShade™ operation.

### ALUMINUM TELESCOPIC POLE

(6'2" to 10'4") for manual operation of venting skylights.

ALUMINUM TELESCOPIC POLE (3' to 6' or 6' to 12') for manual SkyShade™ operation

## MORE DAYLIGHT FOR LESS










Our E-Class skylights sit on the deck, giving you a larger glass area per rough opening compared to competitors' skylights. See dimensions and daylight area specs below.

### 10 YEAR WARRANTY

Wasco skylights' superior design, workmanship, and weathertight performance are backed by a non-prorated, 10 year limited warranty covering materials, insulated glass and workmanship. Ask for details.



## E-CLASS™ STANDARD SIZES

									
Rough Opening	14 1/2" x 30 1/2"	14 1/2" x 46 1/2"	22 1/2" x 22 1/2"	22 1/2" x 30 1/2"	22 1/2" x 38 1/2"	22 1/2" x 46 1/2"	30 1/2" x 30 1/2"	30 1/2" x 46 1/2"	46 1/2" x 46 1/2"

### Venting E-Class Skylights

Model No.	N/A	N/A	EV2222	EV2230	EV2238	EV2246	EV3030	EV3046	EV4646
Daylight Area (glass)	N/A	N/A	20 5/8 x 20 5/8	20 5/8 x 28 5/8	20 5/8 x 36 5/8	20 5/8 x 44 5/8	28 5/8 x 28 5/8	28 5/8 x 44 5/8	44 5/8 x 44 5/8
Daylight Sq. Ft. (glass)	N/A	N/A	2.95	4.10	5.25	6.39	5.69	8.87	13.93

### Fixed E-Class Skylights

Model No.	EF1430	EF1446	EF2222	EF2230	EF2238	EF2246	EF3030	EF3046*	EF4646
Daylight Area (glass)	13 1/8 x 29 1/8	13 1/8 x 45 1/8	21 1/8 x 21 1/8	21 1/8 x 29 1/8	21 1/8 x 37 1/8	21 1/8 x 45 1/8	29 1/8 x 29 1/8	29 1/8 x 45 1/8	45 1/8 x 45 1/8
Daylight Sq. Ft. (glass)	2.65	4.11	3.09	4.27	5.45	6.62	5.89	9.13	14.14

Mulling Kits are available. Each kit contains materials to mull two units side-by-side with 10" between adjacent rough openings.

\*Model EF3046 may also be ordered as EF4630, with the first dimension parallel to the roof ridge.

# CURB-MOUNT SKYLIGHTS

VERSATILE CURB-MOUNTED TECHNOLOGY  
THAT'S EASY TO INSTALL, EASY TO LIVE WITH.



# CURB-MOUNT SKYLIGHTS


## LEAKPROOF, ECONOMICAL SKYLIGHTS FOR CURB-MOUNT APPLICATIONS

- Outstanding performance for tile or metal roofs
- Well-suited to thick roofing materials such as clay tile and concrete
- Rugged, one-piece Permatherm® Vinyl Curb reduces thermal conductivity and condensation
- Built-in condensation channel controls indoor moisture in higher humidity areas
- Co-extruded Weather Gasket ensures minimal air infiltration
- Protective aluminum retainer with durable bronze enamel finish
- Economical units using site-built curbs (min. 3 in 12 pitch)
- Integral Nailing Sill for fast and easy installation


## CHOOSE THE BEST CURB-MOUNT SKYLIGHT TO FIT YOUR NEEDS



FIXED

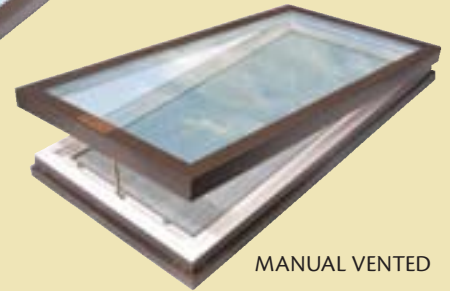

MANUAL VENTED

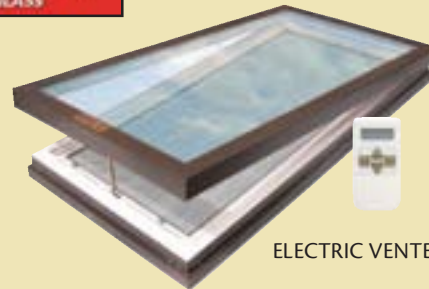

ELECTRIC VENTED

## ALSO AVAILABLE IN A DOMED VERSION

Our Curb-Mount Skylights also comes in a domed version suitable for slate, tile, wood shake, membrane and metal roofing systems. The dome is double-glazed with durable, high molecular density acrylic in your choice of clear or bronze.



## CURB-MOUNT STANDARD SIZES

Model Numbers	Rough Opening	Outside Curb Dimensions	Daylight Area	Daylight Opening Sq. Ft.
GS (V, D) 2222	22 1/2" x 22 1/2"	25 1/2" x 25 1/2"	21 1/8" x 21 1/8"	3.09
GS (V, D) 2230	22 1/2" x 30 1/2"	25 1/2" x 33 1/2"	21 1/8" x 29 1/8"	4.27
GS (V, D) 2238	22 1/2" x 38 1/2"	25 1/2" x 41 1/2"	21 1/8" x 37 1/8"	5.45
GS (V, D) 2246	22 1/2" x 46 1/2"	25 1/2" x 49 1/2"	21 1/8" x 45 1/8"	6.61
GS (V, D) 3030	30 1/2" x 30 1/2"	33 1/2" x 33 1/2"	29 1/8" x 29 1/8"	5.89
GS (V, D) 3046	30 1/2" x 46 1/2"	33 1/2" x 49 1/2"	29 1/8" x 45 1/8"	9.12
GS (V, D) 4646	46 1/2" x 46 1/2"	49 1/2" x 49 1/2"	45 1/8" x 45 1/8"	14.14

V=Venting, D=Domed